

Caractéristiques / Features

Fr • - 2 voies, passage intégral, corps en 2 parties


- Filetage selon DIN EN 10226-1
- Axe de commutation anti-soufflage
- Bille flottante
- Pression de service max.: 40 bar/25 bar (en fonction de la taille)
- Température : -20°C à 180°C (en fonction de la pression de service)
- Sans silicone
- Presse-étoupe réglable (l'écrou du presse-étoupe doit être resserré à intervalles réguliers)
- Homologation DVGW gaz PN16 selon DIN EN 13774
- Conforme LABS selon VDMA 24364

E • 2-way design, Full port, 2-piece body

- Thread acc. to DIN EN 10226-1
- Blow out proved stem design
- Floating ball
- Max. operating pressure: 40 bar/25 bar (depending on size)
- Temperature: -20°C to +180°C (depending on working pressure)
- Free of silicon
- Adjustable stem packing (gland nut has to be retightened within certain period)
- DVGW gas approval PN16 acc. to DIN EN 13774
- LABS conformity acc. to VDMA 24364



KH143

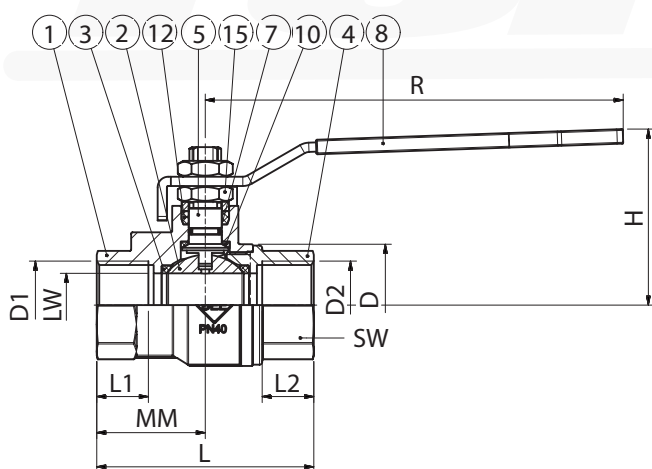


Matériaux / Materials

Nr.	Composant / Part	Matériel
1	Corps / Body	Inox / Stainless steel 1.4408
2	Boisseau / Ball	Inox / Stainless steel, 1.4408
3	Joint à bille / Ball seal	PTFE
4	Bride, embout / Flange, Nipple	Inox / Stainless steel 1.4408
5	Axe de commande / Stem	Inox / Stainless steel 1.4404
7	Joint de tige / Spindle seal	FKM
8	Poignée / Handle	Inox / Stainless steel 1.4301
10	Bague de démarrage / Thrust washer	PTFE GF
12	Paquet / Packing	PTFE
15	Ecrou de presse-étoupe / Packing nut	Inox / Stainless steel A2

Dimensions / Dimensions [mm]

D1	D2	DN	LW	PN [bar]	L	L1	L2	MM	R	H	D	SW	Poids / Weight [kg]
Rp 1/2"	Rp 1/2"	15	14	40	63	15	15	31,5	121	48	32	25	0,259
Rp 3/4"	Rp 3/4"	20	19	40	70	15	15	35	121	52	40	31	0,371
Rp 1"	Rp 1"	25	24	40	82	19,5	19,5	41	158	66,5	46	38	0,607
Rp 1 1/4"	Rp 1 1/4"	32	30	25	96	21,5	21,5	48	158	71	56	48	0,910
Rp 1 1/2"	Rp 1 1/2"	40	38	25	107	21,5	21,5	53,5	158	77	68	54	1,260
Rp 2"	Rp 2"	50	47,2	25	127	26	26	63,5	158	85	85	66	2,110

Diagramme pression-température / Pressure-temperature Diagram

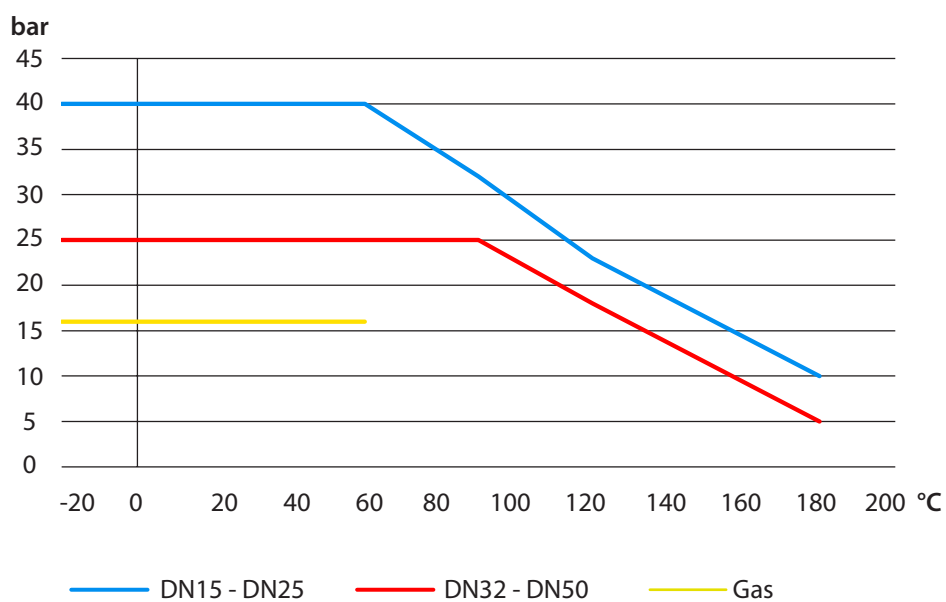

fergo®