


RV105-MMNFI

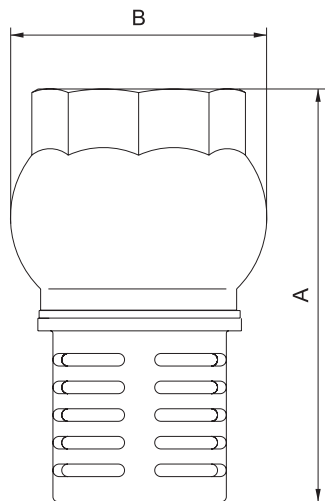


Dimensions [mm]


DN	Pouce	A	B	bar	psi
15	1/2"	59,5	39	10	140
20	3/4"	70,5	45	10	140
25	1"	82	51	10	140
32	1 1/4"	94,5	61	8	110
40	1 1/2"	102	68,5	8	110
50	2"	119,5	80	8	110
65	2 1/2"	139,5	100	6	90
80	3"	174,5	121	6	90
100	4"	194,5	145	6	90

- F**
- Corps : laiton
 - Disque : laiton
 - Siège : NBR
 - Connexion : ISO 228/1
 - Température de fonctionnement max. 90°C.
 - Crépine : Laiton

- E**
- Body: brass
 - Disc: brass
 - Seat: NBR
 - Threads according to ISO 228/1
 - Temperature range: max. 90°C
 - Strainer: brass



RV105-MMNFI

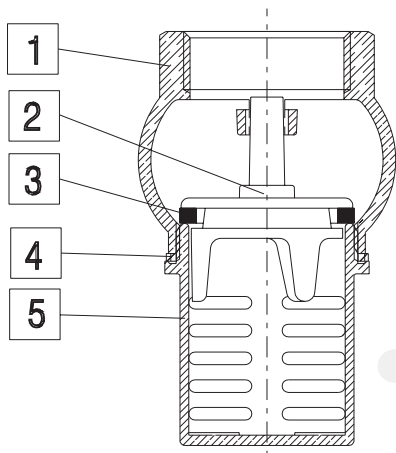

Matériaux

Nr.	Composant / Part	Matériel	Traitement de surface / Surface Treatment
1	Coprs / Body	CW617N	pressé à chaud / hot pressed
2	Disque / Disc	CW614N	
3	Joint d'étanchéité / Sealing	NBR	
4	O-Ring	Sinterine	
5	Crépine / Strainer	CB753S	

