


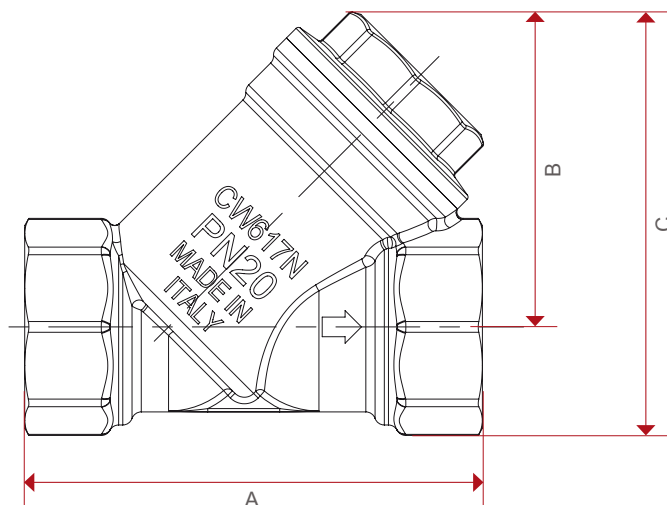

Dimensions [mm]

DN	Pouce	A	B	C	PN	LBS	kv
8	1/4"	55	40	49,7	20	290	2,20
10	3/8"	55	40	51,2	20	290	3,40
15	1/2"	58	40	53,25	20	290	3,80
20	3/4"	70	48	64,6	20	290	7,20
25	1"	87	56	76,35	20	290	11
32	1 1/4"	96	64	87,7	20	290	13
40	1 1/2"	106	73	100	20	290	15
50	2"	126	88,5	122	20	290	28
65	2 1/2"	150	105	147,5	16	232	77
80	3"	169	120	168,5	16	232	93
100	4"	219	162	224,5	16	232	146

Caractéristiques / Features

- F** • Filetage intérieur selon ISO 228
 • Tubulure de vidange
 • Corps et tubulure : Laiton
 • Tamis Largeur des mailles :
 1/4" - 2" : 500 µm
 1 1/2" - 4" : 800 µm
 • Température : -20°C ... +110°C
 • Applications :
 Raccords d'eau domestiques Systèmes de chauffage et de climatisation Systèmes d'air comprimé

- E** • Female threads acc. ISO 228
 • Drain plug
 • Body and plug: Brass
 • Filter mesh size
 1/4" - 2" : 500 µm
 1 1/2" - 4" : 800 µm
 • Temperature: -10°C ... +100°C
 • Applications:
 Domestic water services
 Heating and air-conditioning plants
 Compressed air systems



MY100-MS1NXI

Diagramme débit et perte de charge / Flow rate and pressure drop chart



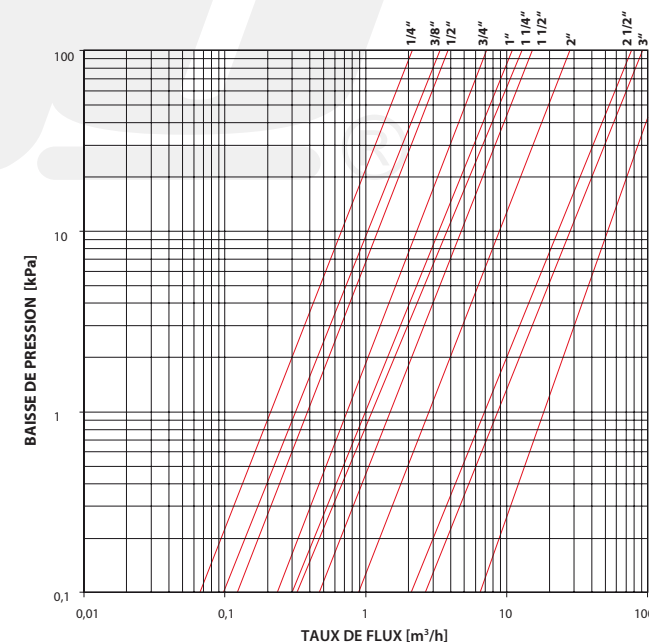


Diagramme pression-température / Pressure-temperature diagram

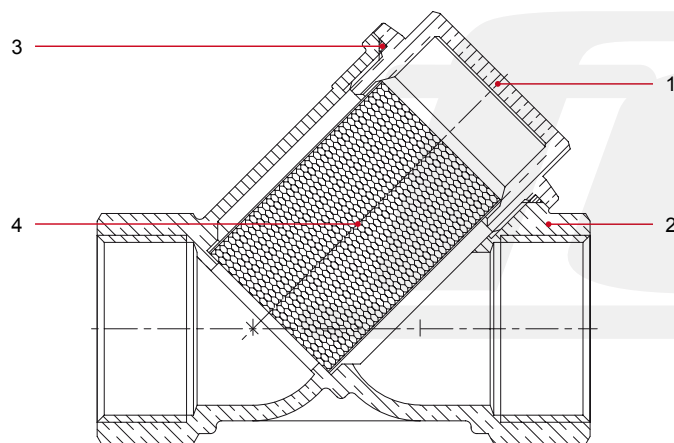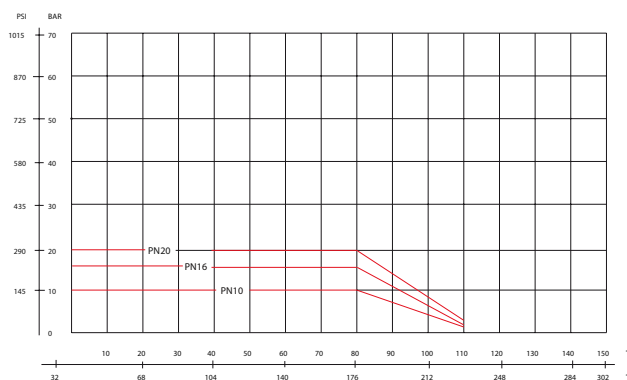

Matériels

Nr.	Composant / Part	Matériel
1	Bouchon de fermeture / End adapter	CW617N
2	Corps / Body	CW617N [1/4" - 2"] / CB753S [2 1/4" - 4"]
3	O-Anneau	NBR
4	Filtre / Filter	AISI 304