
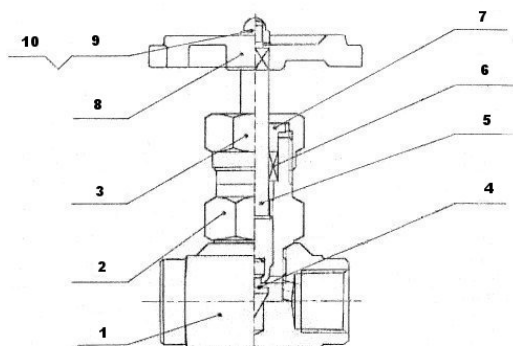


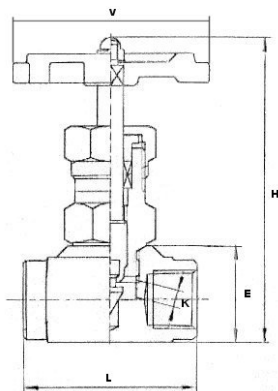

Dimensions / Dimensions [mm]

DN	Pouce	E	H	L	K	V	Poids (kg)	psi
6	1/4"	25	85	50	3	63	0,260	3000
10	3/8"	30	100	55	4	63	0,360	3000
15	1/2"	34	115	60	6	72	0,530	3000
20	3/4"	40	120	70	8	72	0,760	3000
25	1"	45	138	75	9	80	1,175	3000
32	1 1/4"	57	165	90	11	100	1,850	3000
40	1 1/2"	67	185	100	15	120	2,900	3000
50	2"	78	195	120	18	140	4,700	3000

Matériaux / Materials

Nr.	Composant / Part	Matériau	Traitement de surface / Surface Treatment
1	Boîtier / Body	ASTM A182 F316	
2	Bonnet / Bonnet	SS316 (1.4401)	
3	Ecrou / Nut	SS316 (1.4401)	
4	Aiguille / Needle	A182 F6	Traitement à l'azote / Nitrogen Treatment
5	Axe / Stem	ASTM A182 F316	
6	Paquet / Stem packing	PTFE + graphite	
7	Joint d'écrou / Packing nut	SS316 (1.4401)	
8	Volant / Handwheel	Grauguss / Cast iron	laqué / painted
9	Ecrou / Nut	SS304 (1.4301)	
10	Bague d'étanchéité / Washer	SS304 (1.4301)	


Caractéristiques / Features

- Fr**
- Vanne à pointeau
 - Corps : ASTM A182 F316
 - Aiguille : A182 F6
 - Garniture : PTFE + graphite
 - Raccord fileté : ISO 7-1 (EN 10226-1)
 - Plage de température : -30°C à ...
 - 260°C / 3000 psi (1/4" - 1/2" pouce)
 - 240°C / 3000 psi (3/4" - 1 1/4" pouce)
 - 200°C / 3000 psi (1 1/2" - 2" pouce)
 - actionnement : Volant à main
 - Pression nominale : 205 bar / 3000 psi
- E**
- Needle valve
 - Body: ASTM A182 F316
 - Needle: A182 F6
 - Packing: PTFE + graphite
 - Threaded ends: ISO 7-1 (EN 10226-1)
 - Temperature range: -30°C to ...
 - 260°C / 3000 psi (1/4" - 1/2")
 - 240°C / 3000 psi (3/4" - 1 1/4")
 - 200°C / 3000 psi (1 1/2" - 2")
 - Actuation: Handwheel
 - Nominal Pressure: 205 bar / 3000 psi



VN217-SSTNI

COURBES PRESSION-TEMPÉRATURE / PRESSURE TEMPERATURE CURVES

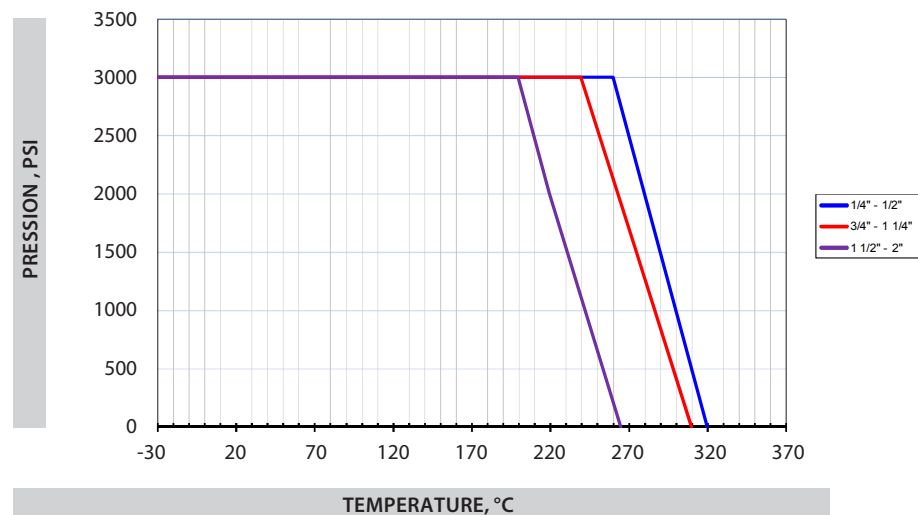

Facteur de débit / Flow Coefficient

Größe / Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
m ³ /h	0,25	0,36	0,47	0,95	1,1	1,6	4,76	5,36

DIAGRAMME DE PERTE DE VITESSE / HEADLOSS DIAGRAM

